

Construction Zone Signs


High Intensity Prism type (Encapsulated)

Ultralite UXC C400 series

UXC C400 series are used for construction zone signs.

Top film:	Acrylic Film
Durability *1:	3 years
Recommended substrate:	Aluminium
Reflectivity *3:	250 cd/lux/m2 (White 0.2°/5°)
Screen printing available *6	

Sample colours *5

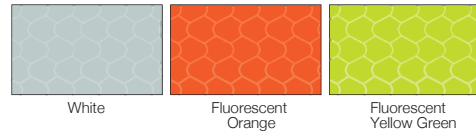


Encapsulated lens type (High Intensity)

Ultralite UL 800 series & 500 series

UL 800 series and 500 series are used for construction zone signs.

Top film:	Acrylic Film
Durability *1:	3 years
Recommended substrate:	Aluminium
Reflectivity *3:	250 cd/lux/m2 (White 0.2°/5°) 180 cd/lux/m2 (White 0.33°/5°)
Screen printing available *6	

Sample colours *5

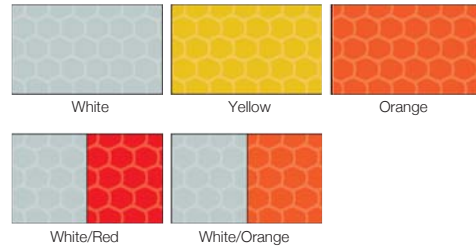

Enclosed lens type

Engineering Grade EG 8100 series

EG 8100 series is used for construction zone signs.

Top film:	Acrylic Film
Durability *1:	3 years
Recommended substrate:	Aluminium
Reflectivity *3:	70 cd/lux/m2 (White 0.2°/5°) 50 cd/lux/m2 (White 0.33°/5°)
Screen printing available *6	

Sample colours *5



Enclosed lens type


Promotional Grade MPG F4300 series

MPG F4300 series has tough surface used for construction zone signs and temporary signs.

Top film:	PET Film
Durability *1:	No guarantee
Recommended substrate:	Aluminium
Reflectivity *3:	30 cd/lux/m2 (White 0.2°/5°)

Screen printing available *6

Sample colours *5

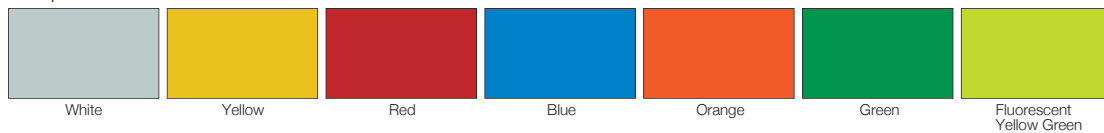

Example of Product Application



*1 The durability is greatly effected by 1)the type of substrate, 2)preparation of the substrate surface, 3)conditions of application and 4)climatic and exposure conditions.
When proper substrates are used, and their surface preparation and application methods are in accordance with Nikkalite™ Bulletins.
*3 Reflectivity is the minimum value. *5 Colours may not be a 100% colour match of the actual material.
*6 If you would like to know the detail of printability, please contact to our technical service.